

Stepper Beta Quick Reference Structure Sound

©2010

Main Page (Tremolo):

turn: adjust shape
push: invert polarity
push: enter sequence editor (if seq showing)
hold: save program


Sequencer Page:

turn: scroll through steps
push: exit sequencer

Menu Pages:

turn: adjust value
push: go back or exit menu
push: cancel or answer "no"

"D", depth knob = depth "G", depth knob = gain "V", depth knob = voltage

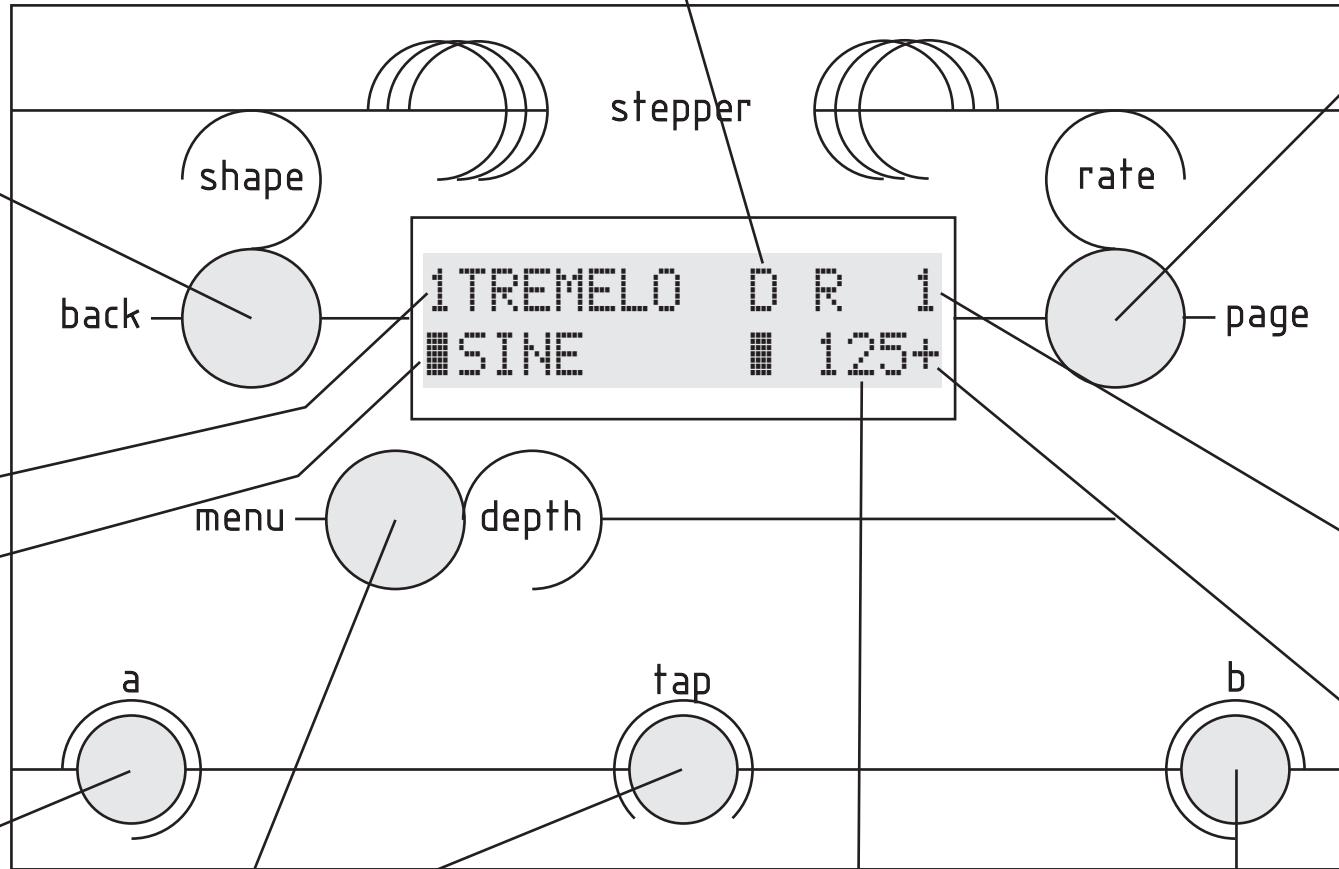

Main Page (Tremolo):

turn: adjust rate
push: change pages
hold: change banks

Menu Pages:

N/A

Sequencer Page:

turn: change sequence
push: link sequence ->

Bank:

1 = pgm 1,2,3
2 = pgm 4,5,6
3 = pgm 7,8,9

indicates pulses in
tap tempo or midi sync
mode

program

lfo indicator

Gate "A":

tap to toggle A bypass
hold and release to load PGM 1

Tap Tempo:

tap quarter notes
double tap to go back to free run
hold and release to load PGM 2

Rate is 0-255 in free run
8measures to 32nd note
in tap tempo, or midi sync

Gate "B":

tap to toggle B bypass
hold and release to load PGM 3

Main Page (Tremolo):

turn: adjust gain or depth
push: toggle between gain and depth
hold: enter menu

Sequencer Page:

turn: adjust step depth
push: set last step of sequence

Menu Pages:

turn: scroll through menu items
push: open selected menu item
push: confirm or answer "yes"